

ANKA CANOPY

LED High Bay Light

CE IP66 LED RoHS eco*

5 YEAR WARRANTY
85% SAVING

NIXON provides a five year manufacturer's guarantee on all Nixon branded products.



Specifications

Body	: Aluminium
Housing	: Aluminium
Diffuser	: Tempered Glass
Beam Angle	: 110° Standart
Weight	: 5,2 KG
Power Source	: 100-277 V AC / 50-60 Hz
System Power	: 115W
Protection Class	: IP66
CCT (Kelvin)	: 5000K

- Patented cooling design of Anka Canopy Series high bay light quickly dissipates the heat generated from led module through high cooling canals on aluminium body.

Anka Canopy is especially designed for fuel stations, sheds and similar structures designed according to the canopy building system.

Anka high bay light provides excellent performance by IP protection class that ensures maximum protection at dusty and humid spaces at production facilities which cause micro scaled dust and which are exposed to moisture.

IP 66 protection class of Anka high bay light allows to use in heavy industrial facilities and utility rooms such as production and warehouse spaces, parking lots, workshops, tunnels, worksites.

Heat Generation



HID/Sodium : 100 C
LED : 35 C

Light Source Life



HID/Sodium : 15.000 Hrs
LED : 50.000 Hrs

Mercury Safety



HID/Sodium : Contains
LED : -

Equal With



HID : 250 W
Sodium : 400 W

APPLICATIONS :

Factory, Industrial Hall, Warehouse, Fuel Station

Available Colors: White



Hi-tech Heat Management



Improved Protection Style





Tempered Glass



- Patented design for heat dissipation to ensure life of light source up to 50,000 hours.
- Low power consumption while high light efficiency, power consumption just 20% as much as high pressure sodium lamp, mercury lamp at the same luminous condition, it saves energy more than 75% than that traditional light.
- Die casting aluminum housing, with anti-static and anti-corrosion coating.
- Advanced quadratic light distribution design result in high uniformity of illumination and good lighting quality, clear lighting effect without a double image.
- Beautiful appearance, several types of installation methods available.


Anka high bay light is suitable for mounting in 3 different types : Wall Mount, ceiling type recessed mount and surface mount

Kelvin Options | 5000 K

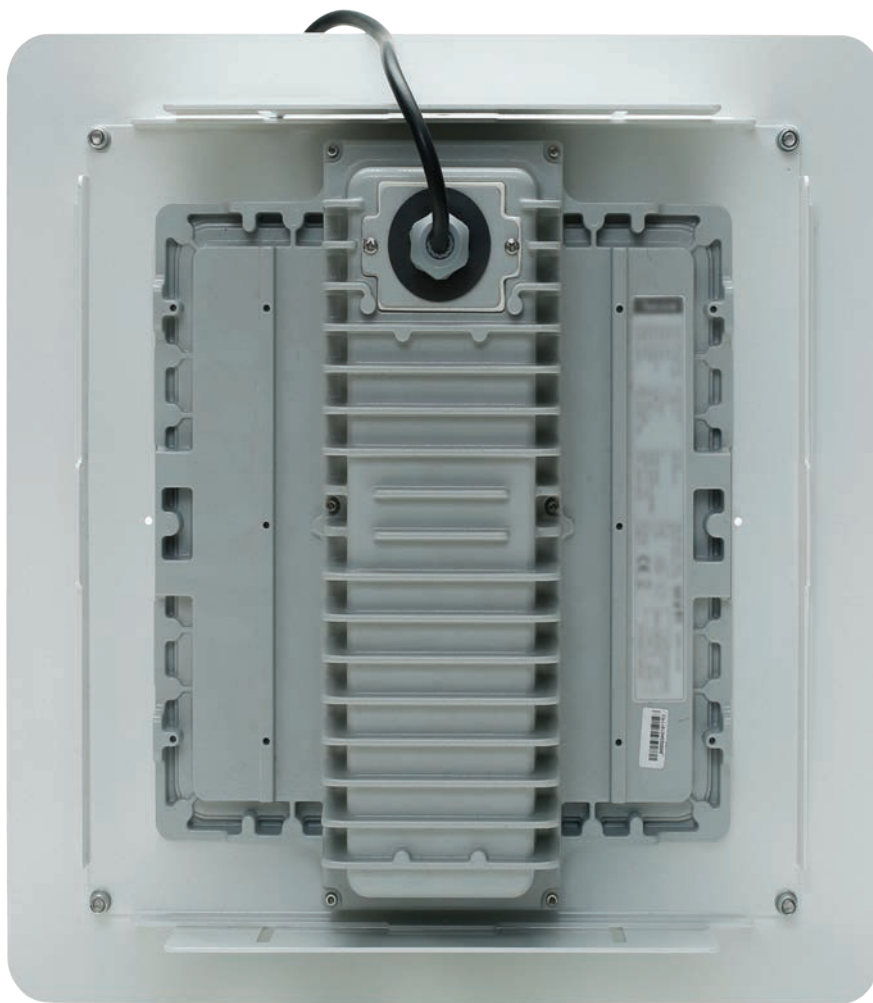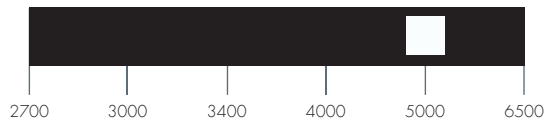


- Lightweight design
- Structure for easy installation
- Long life up to 50,000 hours

Go to nixonled.com for IES specific data and technical drawings.

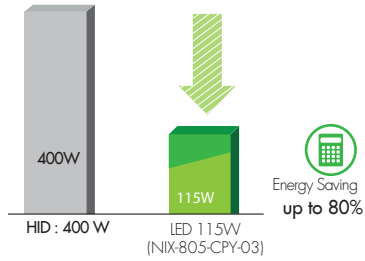


Go to nixonled.com for IES specific data and Light & lumen distribution graphics.

Light & Lumen Distribution Graphics

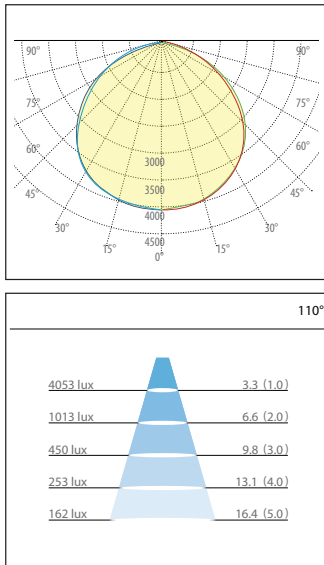

Dimensions & Drawings

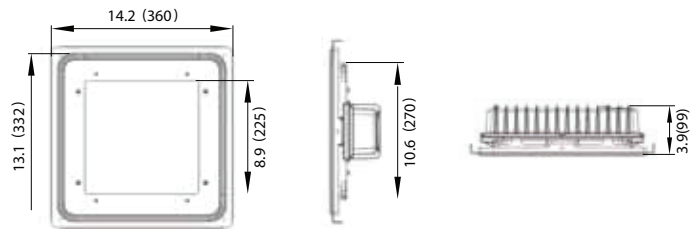

Specifications



NIX-805-CPY-03

Power Consumption	115W
Input Voltage	220V AC (applied for 100-240V)
Frequency	50/60 Hz (applied for 47-63 Hz)
Ingress Protection	IP66
Power Factor	>0.95
Color Temperature(K)	Pure white: 5000K
CRI	Ra > 80
Efficacy	100 lm/W
Lifespan	up to 50000 Hours
Material	99 % Pure Aluminum Alloy
Dimensions	332 x 360 x 99 mm
Net Weight	5,2 kg

Order Information

Article no	System Power	Lumen
NIX-805CPY03	115W	11.500